



GRABBER®
CONSTRUCTION PRODUCTS

Qwik Prep
www.grabberman.com

Acrylitex®


Qwik Prep

Interior Precoat/Primer

Acrylitex Qwik Prep is a fast drying drywall surfacer applied in a production spray application. The product has excellent hide and is very white in color so that you can see your pattern when spraying texture. Acrylitex Qwik Prep may be used as a precoat to uniform various porosities between drywall paper and joints or as a primer prior to paint to ensure the finish coat will be a smooth and uniform sheen.

For use on interior walls & ceilings

- ▶ Uniforms various porosities between drywall paper and joints
- ▶ Ensures the finish coat will be a smooth and uniform sheen

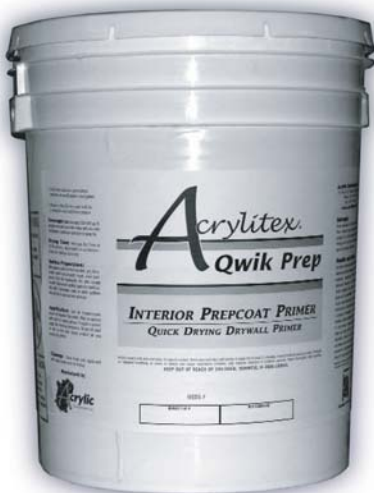

Acrylitex Qwik Prep is designed for use as an undercoating for texture and paint on interior walls and ceilings. Our liability is expressly limited to the replacement of defective product.



QUICK DRYING - HIGH HIDE

Coverage

Approximately 350-400 square feet per gallon for optimum hide. Coverage rates will vary with mil thickness, applicator technique and type of spray tip (amount of fallout).

Recommended Mil Rate

Apply 6 wet mils. Average dry time is 15-20 min. dependent on air temperature and relative humidity.

Packaging

Available in 5 gallon and 55 gallon containers and 275 gallon totes.

Colors

Available in one color – White.

Application

May be applied with roller or airless sprayer. Product is bucket ready. No thinning necessary. Use at temperatures above 50 degrees F. Brush off dust or dirt on the wall. Apply as you would any primer.

Cleanup

Clean tools and equipment with soapy water prior to drying.

"If it's worth building, it's worth *GRABBER*"

205 Mason Circle, Concord CA 94520

1.800.477.8876

www.grabberman.com



Acrylitex Interior Texture and Coating Submittal Documentation

Project: _____

Contractor: _____

Installer: _____

Supplier: John Wagner & Associates dba
Grabber Construction Products
866-237-GRAB(4722)

Distributor: _____

Specification Sheet

Acrylitex Qwik Prep PF4504-02



Manufacturer: Acrylic Technologies, Inc.
P.O. Box 8359, Bend, Oregon 97708
Phone: 541.617.9494 / Fax: 541.617.9595

Product Description: Acrylitex Qwik Prep is a fast drying drywall surfacer applied in a production spray application. The product has excellent hide and is very white in color so that you can see your pattern when spraying texture. Acrylitex Qwik Prep may be used as a prep coat to uniform various porosities between drywall paper and joints or as a primer prior to paint to ensure the finish coat will be a smooth and uniform sheen.

Coverage: Approximately 350-400 square feet per gallon for optimum hide. Coverage rates will vary with mil thickness, applicator technique and type of spray tip (amount of fallout).

Recommended Mil Rate: Apply 6 wet mils. Average dry time is 15-20 minutes dependent on air temperature and relative humidity.

Packaging: Available in 5 gallon and 55 gallon containers and 275 gallon totes.

Colors: Available in one color – White.

Preparation for Substrates of Gypsum, Plaster and Concrete:

1. Surfaces must be clean, dry, sound and properly cured.
2. Surfaces must be free of sanding dust, dirt, oil, grease, mildew, fungus, efflorescence, loose paint or other contaminants.
3. Surfaces must be free of chalking, blistering, peeling, cracking and delaminating
4. Surface must be completely dry before application.

Application Equipment: Apply Acrylitex Qwik Prep with roller or airless sprayer. Respirator not required but recommended. Clean tools, equipment and skin with soapy water and rinse.

Application: Product is bucket ready. No thinning necessary. Apply product as you would any primer.

Acrylitex Qwik Prep is designed for use as an undercoating for texture and finish paint on interior walls and ceilings. Our liability is expressly limited to the replacement of defective product.



MATERIAL SAFETY DATA SHEET

MSDS Name: ACRYLITEX QWIK PREP
MSDS Number: PF4504-02
Version Number: 0009
MSDS Date: 03/10/04
Page Number: 1 of 5

SECTION I - PRODUCT AND COMPANY INFORMATION

Product Name: ACRYLITEX QWIK PREP
CAS Number: MIXTURE
Hazard Rating: Health: 1 Fire: 1 Reactivity: 0 PPI: E
EPA Registration: NA

Company Identification: Acrylic Technologies, Inc.
P.O. Box 8359
Bend OR 97708
Contact: CUSTOMER SERVICE
Telephone/Fax: (541) 617-9494 / (541) 617-9595
Emergency Phone (24 Hour): INFOTRAC
(800) 535-5053
Preparer: ROBERTA M. DECHERT

Product Class: WATERBASE PAINT
Trade Name: ACRYLITEX QWIK PREP
Product Code: PF4504-01

SECTION II - INGREDIENT AND HAZARD INFORMATION

Hazardous Ingredients

CAS Number	%	TSCA	Health	Fire	React	PP
(No hazardous ingredients known at this time.)						

SECTION III - HAZARDS IDENTIFICATION

PRIMARY ROUTES OF ENTRY:

Ingestion and/or inhalation.

CARCINOGENICITY:

This product does not contain any substance(s) listed as a carcinogen by NTP, IARC, or OSHA.

ACUTE (SHORT TERM) FOR PRODUCT:

EYES: Causes irritation.

SKIN: May cause skin irritation upon prolonged or repeated contact.

BREATHING: Causes slight irritation to nose and throat.

SWALLOWING: Ingestion may cause nausea, vomiting, diarrhea.

CHRONIC (LONG TERM) FOR PRODUCT OR COMPONENTS:

Prolonged or repeated breathing of sprays, mists, or dusts in excess of the suggested TLV may cause nasal and respiratory irritations.

PERMISSIBLE EXPOSURE LEVEL FOR PRODUCT:

No Threshold Limit Value (TLV) has been established for the product. Current Adopted Values listed by ACGIH suggests a TLV of 10 mg/m³ as Inhalable Particulates Not Otherwise Classified for sprays, mists or dust particulates generated during application or handling exposures.

MATERIAL SAFETY DATA SHEET

MSDS Name: ACRYLITEX QWIK PREP
MSDS Number: PF4504-02
Version Number: 0009
MSDS Date: 03/10/04
Page Number: 2 of 5

SECTION IV - FIRST AID MEASURES

IF IN EYES: Immediately flush eyes with plenty of water for at least 15 minutes. If irritation continues, see a physician.

IF ON SKIN: Flush skin with water.

IF SWALLOWED: Induce vomiting. Call a physician immediately. Give large amounts of water or milk. Never give anything by mouth to an unconscious or convulsing person.

IF BREATHED: Remove person to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing is difficult, give oxygen. Call a physician.

SECTION V - FIRE-FIGHTING MEASURES

Flammability Class: IIIB
Flash Range: >200F
Explosive Range: Not Applicable

EXTINGUISHING MEDIA:

Extinguishing media: Product is non-combustible.

SPECIAL FIREFIGHTING PROCEDURES:

Use self-contained breathing apparatus with full face piece.

UNUSUAL FIRE & EXPLOSION HAZARDS:

None.

SECTION VI - ACCIDENTAL RELEASE MEASURES

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED

SMALL SPILLS: Contain spill immediately. Use inert material to absorb spilled material. Place absorbed spill into secure container for removal.

LARGE SPILLS: Use caution; spilled material may be extremely slippery. Contain spill immediately and prevent from entering the sewer system. Use an inert material to absorb spilled product.

NOTE: Rinsing this material down a sanitary sewer system can cause negative impact on monitoring systems. Contact local sewer authorities before attempting any discharges.

SECTION VII - HANDLING AND STORAGE

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE:

PROTECT FROM FREEZING. Store product between 40 deg. F. and 120 deg. F. Frozen product may be irreversibly damaged. Product should be kept out of direct sunlight at all times. Keep container closed when not using.

MATERIAL SAFETY DATA SHEET

MSDS Name: ACRYLITEX QWIK PREP
MSDS Number: PF4504-02
Version Number: 0009
MSDS Date: 03/10/04
Page Number: 3 of 5

SECTION VIII - EXPOSURE CONTROLS/PERSONAL PROTECTION

Occupational Exposure Limits

ACGIH TLV	ACGIH TLV-C	ACGIH STEL	OSHA STEL	OSHA PEL
-----------	-------------	------------	-----------	----------

RESPIRATORY PROTECTION:

Use an approved MSHA or NIOSH respirator for nuisance mists, dusts, or sprays.

VENTILATION:

Use adequate ventilation to keep airborne concentrations below the exposure standard listed in Section II and/or Section V.

PROTECTIVE GLOVES:

None normally required. Use is advisable.

EYE PROTECTION:

Wear approved splashproof chemical goggles. In a controlled environment where eye contact is minimal, Safety glasses with side shields may be sufficient protection.

OTHER PROTECTIVE EQUIPMENT:

Avoid contact with clothing, dried product may be irremovable.

SECTION IX - PHYSICAL AND CHEMICAL PROPERTIES

Form:	LIQUID
Appearance/Color:	WHITE
Odor:	MILD
Solubility (in water):	DISPERSIBLE
pH Value:	8.5 - 10.0
Boiling Range:	(WATER) 212.F (100.C)
Vapor Pressure (mmHg):	(WATER) 17. @ 68.F (20.C)
Melting Point:	Not Available
Evaporation Rate:	Unavailable
Vapor Density:	Non Volatile
Partition Coefficient	Not Available
% Volatile Volume	INCLUDING WATER 69.2%
Specific Gravity:	1.4462
VOC	SEE SECTION XVI
Molecular Weight:	MIXTURE

SECTION X - STABILITY AND REACTIVITY

Stability:	This product is stable
Hazardous Polymerization:	Hazardous polymerization will not occur

INCOMPATIBILITY:

None

MATERIAL SAFETY DATA SHEET

MSDS Name: ACRYLITEX QWIK PREP
MSDS Number: PF4504-02
Version Number: 0009
MSDS Date: 03/10/04
Page Number: 4 of 5

CONDITIONS TO AVOID:

Acids, strong oxidizing agents.

HAZARDOUS DECOMPOSITION PRODUCTS

Thermal decomposition or burning may produce carbon monoxide and/or carbon dioxide.

SECTION XI - TOXICOLOGICAL INFORMATION

Lethal Dose Information (ppm)

ADDITIONAL TOXICOLOGICAL DATA FOR PRODUCT AND/OR INGREDIENTS:

None known for product.

SECTION XII - ECOLOGICAL INFORMATION

ECOLOGICAL INFORMATION FOR PRODUCT AND/OR INGREDIENTS:

Aquatic toxicity not available.

SECTION XIII - DISPOSAL CONSIDERATIONS

EPA Hazardous Waste Number NONE

WASTE DISPOSAL METHOD:

Product must be disposed of properly under Federal/State regulations for industrial waste. Disposal to a landfill may be permitted pending compliance with 40 CFR 264.314 & 265.314. This product when spilled or disposed of is a non-hazardous waste as defined in RCRA regulations (40 CFR 261).

SECTION XIV - TRANSPORT INFORMATION

UN Number: NONE
UN Pack Group: NA
UN Class: NA
ICAO/IATA Class: NONE
DOT Hazard Class: NOT HAZARDOUS

CANADIAN TDG/WHMIS INFORMATION:

PIN NUMBER: None
TDG: NA
TDG ACT CLASS: NA
WHMIS: NA
OTHER NAMES: None

MATERIAL SAFETY DATA SHEET

MSDS Name: ACRYLITEX QWIK PREP
MSDS Number: PF4504-02
Version Number: 0009
MSDS Date: 03/10/04
Page Number: 5 of 5

SECTION XV - REGULATORY INFORMATION

EEC Classification Irritant

This product is not a listed hazardous substance.

SECTION XVI - OTHER INFORMATION

ADDITIONAL PRECAUTIONS AND NOTES:

Do not dilute or mix with other materials unless advised by supplier.

VOC INFORMATION

A Certified Product Data Sheet (CPDS) as outlined under Title 40 Part 63, Subpart JJ, Section 63.801 Definitions, detailing VOC content, will be available upon request.



TECHNICAL PRODUCT BULLETIN

PF4504-02 Acrylitex Qwik Prep

Physical Characteristics

Weight per Gallon: 12 ± 2 lb

pH: 8 ± 1

% Solids by Weight: $55 \pm 5\%$

Substrate: Gypsum wallboard, concrete

% Solids by Volume: $30 \pm 10\%$

Pre-Treatment: None

Viscosity @ 78°F (25.5°C): 1200 ± 300 cps

Form: Liquid, Ready-to-Use

Flash Point (Closed Cup): None

Color: White

Spreading Rate: 487 ft² @ 1 dry mil

Odor: Mild Latex

Material VOC: < 50 g/ltr (< 0.4 lb/gal)

Carrier: Water-base

Coating VOC (minus water): < 75 g/ltr (0.6 lb/gal)

Note: a certified product data sheet detailing VOC content will be available upon request from Acrylic Technologies, Inc. Environmental Department.

Application Specifications

Method: Product can be applied by spray application.

Drying Schedule: Ambient air, forced air **Reduction:** None

Special Notes

Effect on Freezing: DO NOT FREEZE; product will not recover

Shelf Life: 12 months - please rotate stock on a regular basis

Regulatory Status: This product is not considered a hazardous waste under current RCRA regulations. PF4504-02 does not contain, nor is it manufactured using ozone-depleting substances as listed under Section 611 of the Clean Air Act.

Before using this product, please read the Material Safety Data Sheet for PF4504-02 Acrylitex® Qwik Prep and follow the recommended safety instructions.

WARRANTY – The information and recommendations contained on labels and in bulletins offered by this company are to the best of our knowledge, accurate and reliable. No guarantee of their accuracy is made, however, and the products discussed are sold upon condition that the purchaser shall make his own tests to determine the suitability of such products for his particular purposes and uses. Nothing in bulletins or on labels constitutes permission or a recommendation to practice or use any invention covered by any patent by any company or person. Our liability will be limited to replacement of merchandise found to be defective by our company's representatives. The manufacturer shall not be liable for any consequential damage or incident made by any of its agents.