

Light Gauge Metal (20-25)**Product #285****Bugle Head Cabinet STREAKER®** (1 OF 2)**For cabinet assembly attaching to 20-14 gauge steel or wood.****Finish - Black/Gray Phosphate**Bugle
Head23° Streaker®
Point#2 Phillips
Drive**APPLICATIONS**

- ▶ Cabinet assembly and installation
- ▶ Face frame assembly

PRODUCT FEATURES

- ▶ Super sharp, 23° STREAKER® point, designed to penetrate steel quickly and easily
- ▶ The Bugle head is designed to seat fast and easily into soft wood or drywall, creating a flush surface finish.
- ▶ #2 Phillips Recess

SPECIFICATIONS

- ▶ Gauge - #7
- ▶ Length — 1-1/2"
- ▶ Head Type — Bugle
- ▶ Recess Type — #2 Phillips
- ▶ Thread Type — Single Lead
- ▶ Finish — Black/Gray Phosphate
- ▶ GRABBER® screws are manufactured in an ISO 9002 and ISO 14001 certified and approved factory, and are approved by ICCES report ER-5280.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance — 4 amps minimum and 2500 RPM.
- ▶ The bugle head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.

Light Gauge Metal (20-25)
Product #285
Bugle Head Cabinet STREAKER® (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
6W	#7x1-1/2"	38 mm	5 M	20.00(lbs)

*1lb Box screw packaging option available on selected items.

PRODUCT DIMENSIONS (MILLIMETERS)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.25	3.75	8
	8.50	0.80		2.72	2.45	3.95	
#7	8.00	0.50	#2	2.93	2.50	4.05	8
	8.50	0.80		2.97	2.80	4.30	
#8	8.00	0.50	#2	3.18	2.80	4.30	8
	8.50	0.80		3.22	3.10	4.60	
#10	8.50	0.50	#2	3.78	3.20	5.00	8
	8.90	0.80		3.82	3.50	5.30	


PULL-OUT TEST DATA

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#7	20	222	817
	25	100	245

**GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust

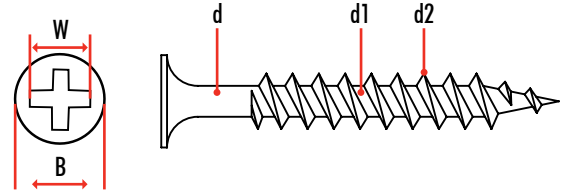

All GRABBER® screw products are manufactured in facilities that are ISO 9002 and ISO 14001 certified and approved. The fasteners comply with ASTM C1002, as referenced in ICCES report ER-5280 are approved for use in structures governed by the International Building Code 2006, 2009, 2012, International Residential Building Code 2006, 2009, and 2012. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

