
Specifications Crave CRAVE6048



Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Crave6048
48" Direct Vent Gas Fireplace


MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE
CRAVE6048	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	47-1/2 x 12-1/2
	58	60-1/4	58	60-1/4	41-3/4	42	17-1/8	18-1/4	

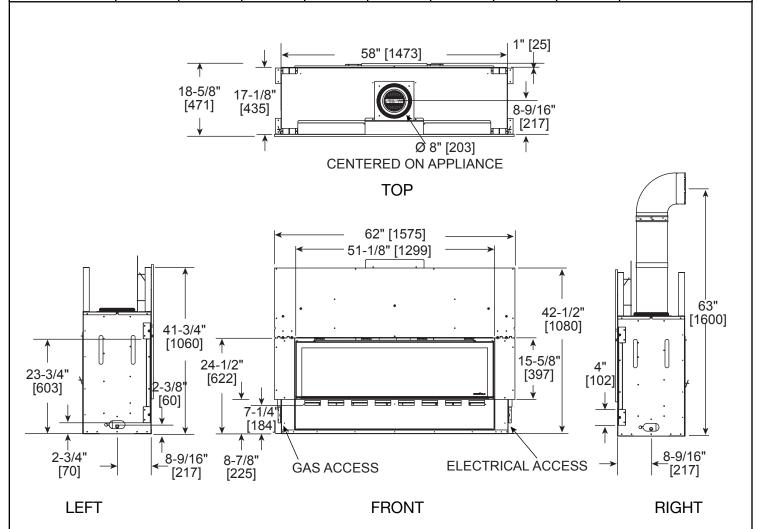

## **BEFORE FRAMING, PLEASE NOTE:**


A minimum of 24" of vertical venting is required before attaching any elbow to the appliance.

#### FRONT DIMENSIONS

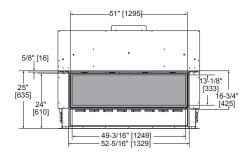


**CLEAN FACE TRIM** 

- Rectangular holes on bottom of access panel <u>should be</u> <u>covered</u>.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are 0-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.

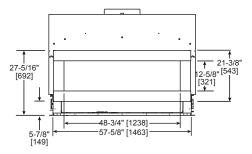

FOUR SQUARE FRONT


- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method




## **ILLUSION FRONT**

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method

## FINISHED OPENING DIMENSIONS

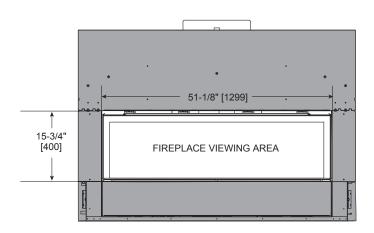

INSIDE FIT METHOD (CLEAN FACE TRIM)

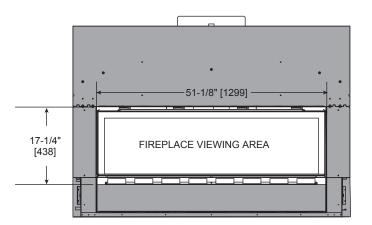


OVERLAP FIT METHOD (FOUR SQUARE, ILLUSION)




Specifications Crave CRAVE6048


#### APPLIANCE LOCATION

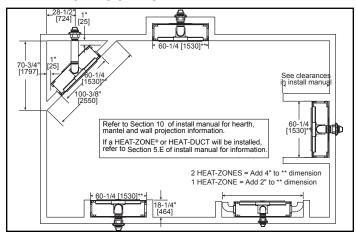


#### **WALL PENETRATION**

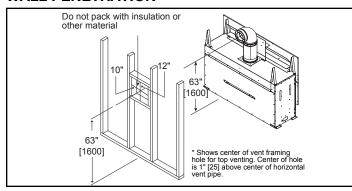


## **MANTEL PROJECTIONS - COMBUSTIBLE**

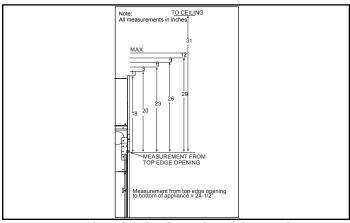


#### **MANTEL PROJECTIONS - NON-COMBUSTIBLE**

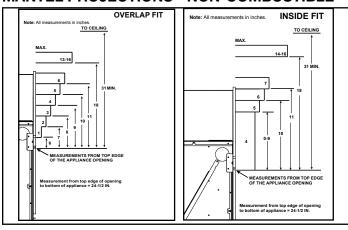


## FRAMING DIMENSIONS

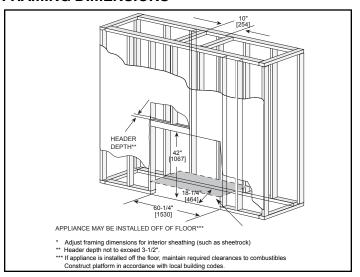

### **CLEARANCES TO COMBUSTIBLES**

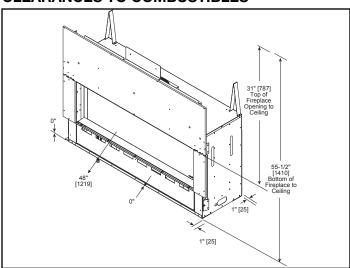

# MANTEL LEG/WALL PROJECTIONS COMBUSTIBLE OR NON-COMBUSTIBLE

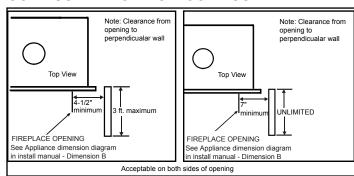

PRODUCT LISTING CODES				
US	ANSI Z21.88-2014			
CAN	CSA 2.33-2014			
C UL US LISTED	UL307B			

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com



