

# IMPACT RESISTANT SHINGLES

The Calm  
During  
The Storm

**CertainTeed**  
SAINT-GOBAIN

# Roofing that outperforms Mother Nature


In 1996 the Institute of Business and Home Safety (IBHS) and the Underwriter's Laboratory (UL) developed the UL 2218 classification, a national standard for roof impact resistance by rating materials from Class 1 through 4, based on their resistance to the steel ball simulation test. A Class 4 rating is the toughest.

Rating	Description
1	Sample did not crack when hit twice in the same spot by a steel ball 1.25 inches in diameter.
2	Sample did not crack when hit twice in the same spot by a steel ball 1.50 inches in diameter.
3	Sample did not crack when hit twice in the same spot by a steel ball 1.75 inches in diameter.
4	Sample did not crack when hit twice in the same spot by a steel ball 2.00 inches in diameter.

# Wind. Rain. Sleet. Heat.

CertainTeed's line of impact resistant products ensure peace of mind—and unflappable protection—even during the harshest conditions.

Built from the industry's toughest materials, our impact resistant shingles defend against updrafts, crosswinds and all manner of gusty, blustery weather.

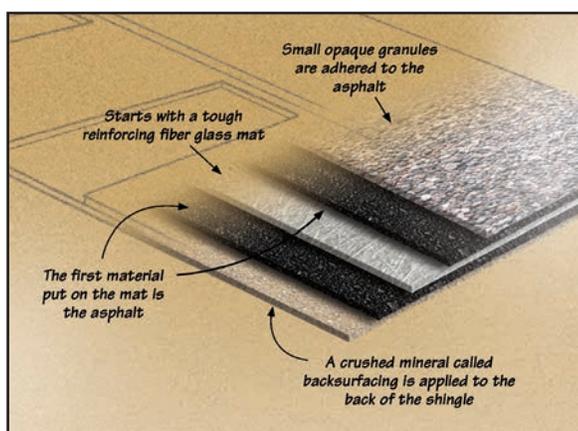

As hail is propelled onto a non-impact resistant shingle, it knocks off granules of the shingle's outer layer—exposing it to UV damage that can degrade the roof and make it vulnerable to leaks.



When severe weather hits, don't leave the safety of your home up in the air.

**Be prepared. Be Certain.**

# Unrelenting protection... that's proven

Our impact resistant shingles are tough. And we've got the evidence to prove it.

Each shingle in our line is made from materials that have achieved the highest impact resistance rating—Class 4—during testing performed with steel balls simulating 90-mph hailstones of varying sizes.

### Class 4 UL 2218 Impact Test

The UL test drops a steel ball from 20 ft. to see if the material will crack.

On a standard shingle cracks and ruptures will appear.

On a Class 4 rated shingle, no evidence of cracking or tearing is present.

- The test evaluates the effect of impact from the steel ball at locations on the assembly selected to be most vulnerable, including the edges, corners, unsupported sections and joints.
- Steel balls are dropped from heights of 12 feet for a 1.25-inch ball, to 20 feet for a 2-inch ball, simulating the impact energy of free-falling hailstones. Our impact resistant shingles remained intact, even when struck by the 2-inch steel ball.
- To meet the acceptance criteria of UL 2218, the roof covering material exposed surface, back surface and underneath layers must show no evidence of tearing, fracturing, cracking, splitting, rupture, crazing or other evidence of opening of the roof covering layer.

# A strong roof. A stylish home.

IMPACT RESISTANT shingles will give you both.

Our shingles achieve the highest impact resistance rating available—all while maintaining the beauty and curb appeal you expect from CertainTeed



## HAVING A ROOF THAT'S EXTRA STRONG SHOULDN'T MEAN COMPROMISING ON STYLE.

That's why we give you choices to suit your needs and tastes — even when it comes to impact resistant shingles.

Each of the options below has an added fiberglass backing. It's there to provide an enhanced level of impact resistant protection over and above the high durability these popular, strong shingles already possess. Each of these shingles has proven it can stand up to the force of a two-inch steel ball dropped from twenty feet without cracking.

### SPECIFICATIONS & WARRANTY


- Impact resistant: UL 2218 Class 4 rating
- Fiberglass-based construction
- UL Class A fire resistance
- 275 lb. per square (Belmont IR)
- 355 lb. per square (Presidential Shake IR)
- 250 lb. per square (Landmark IR)
- 240 lb. per square (Highland Slate IR)
- 270 lb. per square (NorthGate)
- 230 lb. per square (XT 30 IR)
- UL Certified to meet ASTM D3462
- Conforms to CSA Standard A123.5-98
- 30-year (XT 30 IR) or lifetime (all other products noted above) limited transferable warranties against manufacturing defects\*\*
- 50-year or 40-year limited transferable warranty against manufacturing defects of group-owned or commercial applications\*\*
- 10-year or 5-year SureStart™ protection\*\*
- 15-year or 10-year StreakFighter® algae-resistance warranty\*\*
- 15-year, 110 mph wind warranty with upgrade to 130 mph for all products except XT 30 IR which carries warranty of 70 mph.\*\*\*

*For U.S. building code compliance, see product specification sheets.*

*\*\*See actual warranty for specific details and limitations.*



*\*\*\*See warranty for application requirements.*

# BELMONT<sup>®</sup> IR *Product only available in select areas.*

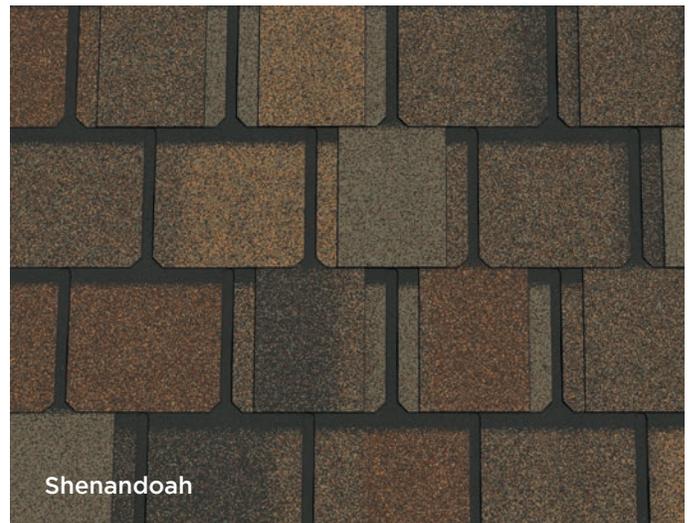


An ideal choice for homes with great steep sloped roofs. Randomly placed tabs have shadow lines that provide the wonderful depth and dimension of a natural slate roof.

# PRESIDENTIAL SHAKE® IR

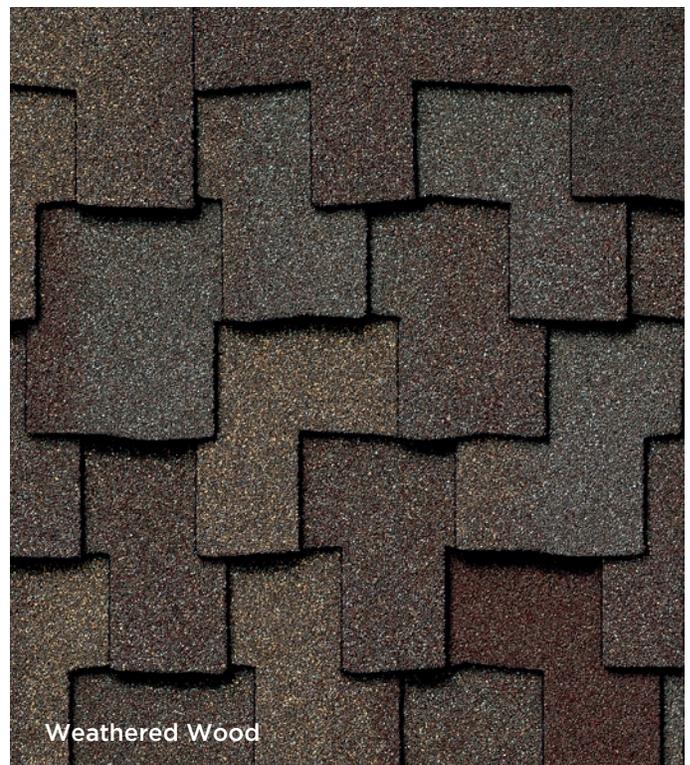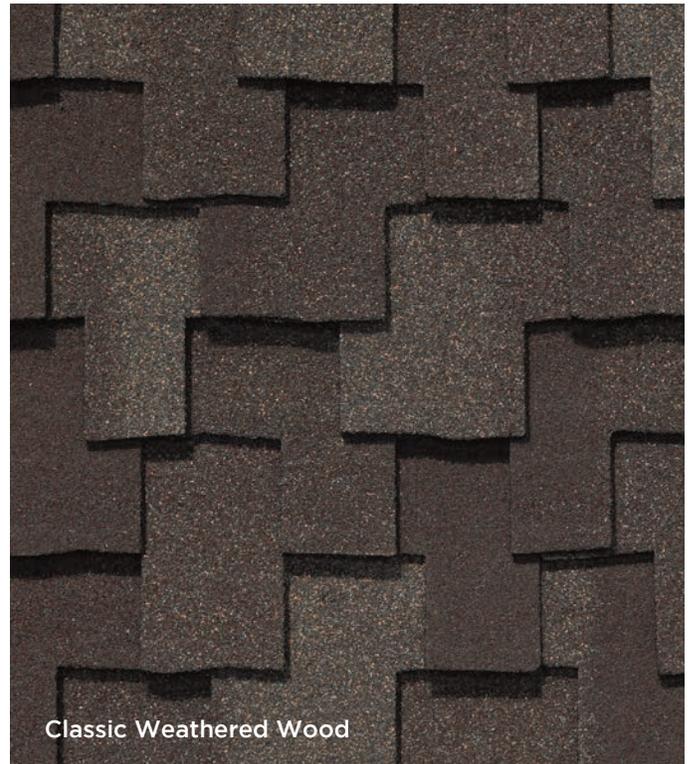

The sculpted edges and staggered design combine to give your roof the charm and beauty of authentic wood shakes. Presidential Shake IR, made of two laminated layers of the industry's most durable materials, was the first of its kind. No other shingle replicates the look of real wood shakes quite so stunningly.

# LANDMARK® IR

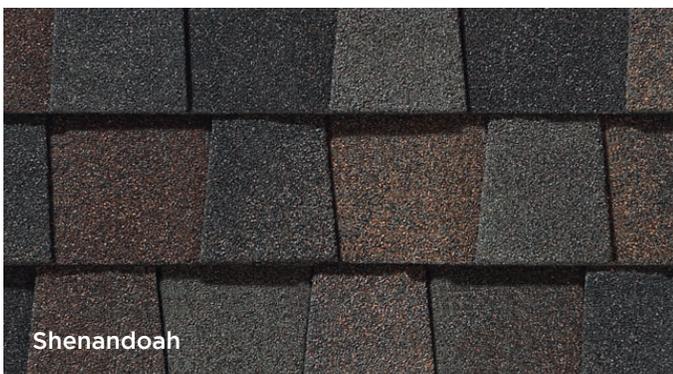

With soft shadow lines, a random tab design and a patented color blending process, Landmark IR gives your roof the classic shades and dimensional appearance of natural roofing materials. Designer looks combine with high durability to produce a shingle with a lifetime warranty.

# HIGHLAND SLATE® IR



Cut to a true craggy profile, Highland Slate IR has the look, texture and tone of natural slate with a dark shadow line to accentuate its appeal from the curb. Each tab is individually colored by state of the art Precision Color technology to provide a rich, deep, hue and its four-across tab is the ideal design to deliver color, contrast, and perfection when mounted.

# NORTHGATE®

Product and color availability varies by region.



Max Def Burnt Sienna




Max Def Driftwood




Max Def Georgetown Gray




Max Def Granite Gray

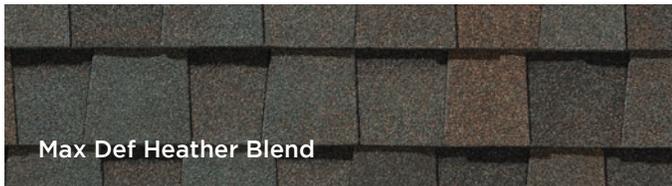


Max Def Heather Blend

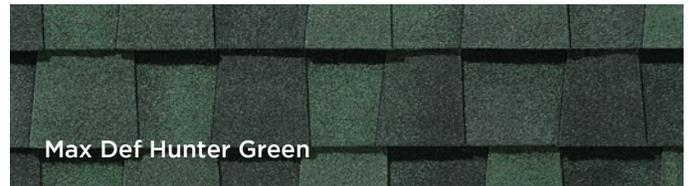

Max Def Hunter Green

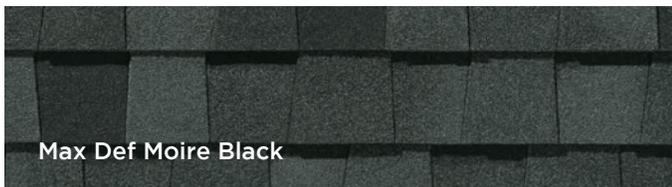


Max Def Moire Black

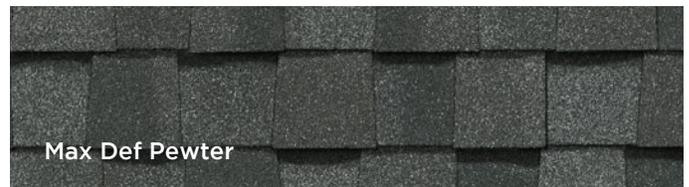

Max Def Pewter



Max Def Resawn Shake

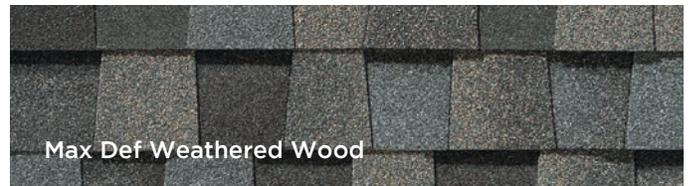

Max Def Weathered Wood



Silver Birch  
CRRC Product ID 0668-0072



## Bend But Never Break


Made from a blend of premium roofing asphalt that includes specialized SBS modifiers, NorthGate architectural shingles offer a durability that cannot be matched by standard asphalt shingles.

**Why SBS?** SBS is a rubber-like ingredient used to modify the pliability and weatherability of our roofing asphalt. Shingles created with SBS-modified asphalt look just like traditional shingles, yet provide enhancements to important performance characteristics such as impact resistance, tear resistance and surface granule adhesion. This makes SBS-modified shingles an ideal roofing solution for homes in regions where hail storms are prevalent.

Compare the pliability difference of NorthGate and a non-SBS modified product at 0° F.



non-modified asphalt shingle with cracking




SBS-modified asphalt shingle with no cracking

### Improvement of SBS-modified vs. Standard Asphalt Shingles

Physical Property	Improvement
Tear Strength	40%
Granule Loss	15%
Nail Pull Resistance	40%
Cold Flexibility (0° F)	Passes

# CERTAINTEED XT<sup>®</sup> 30 IR

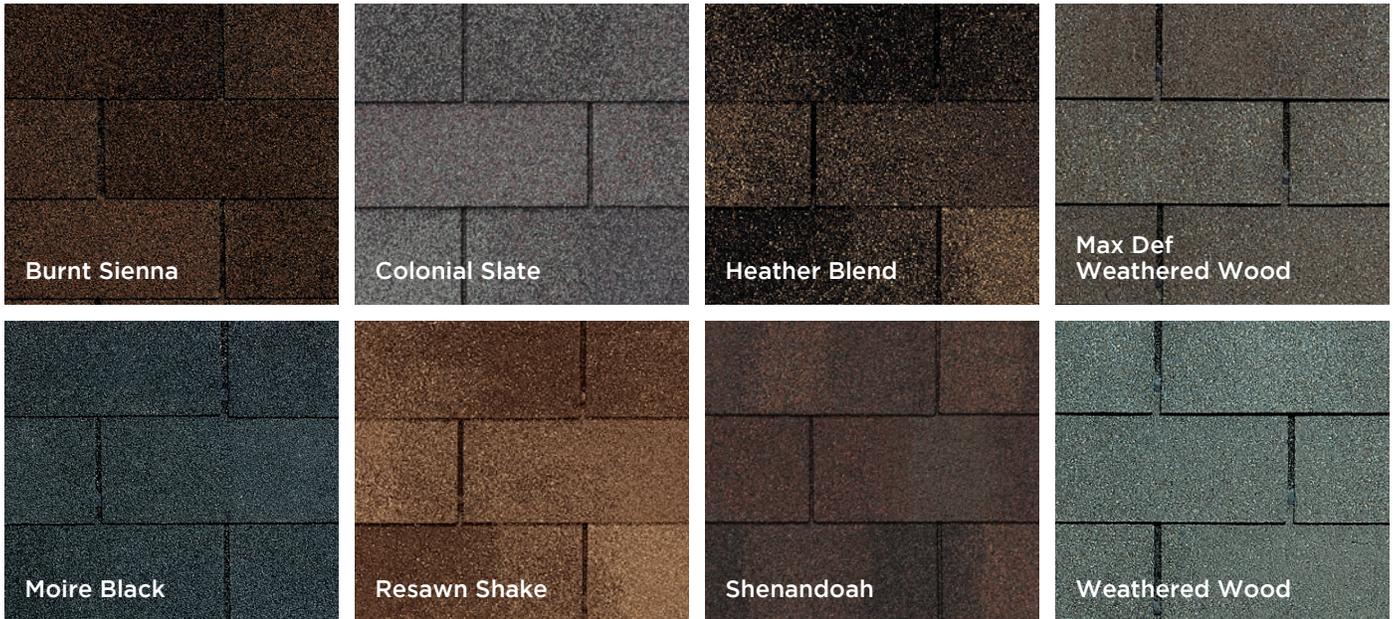

With the added impact resistance, this traditional three-tab shingle offers a level of protection that's far from everyday. It's available in several colors and has a 30-year warranty.

*Color availability varies by region.*

## Add the right accessories and ensure full protection

For your Landmark IR or XT 30 impact resistant roof, use CertainTeed XT 30 UL 2218 Class 4 impact resistant roofing shingles of the same color for capping hips and ridges. Double capping will add depth and dimension. For Landmark Solaris IR, use impact resistant Solaris Accessory on the hips and ridges. For Highland Slate IR, use impact resistant Cedar Crest accessory on the hips and ridges. Both accessory products are available in colors to complement the field shingles.

To ensure your entire Presidential Shake IR roof meets UL 2218 Class 4 impact resistance, impact resistant Cedar Crest Accessory must be used on the hips & ridges, and Impact Resistant Presidential Starter must be used for the starter course.



# Color Companion Products for Flat Roof Areas

Consider using Flintlastic SA roofing systems on low-sloped roof pitches, such as porches and carports. Flintlastic SA Cap sheets are available in colors to complement your CertainTeed shingle roof.

A variety of 2-ply and 3-ply Flintlastic SA systems are available which pass UL 2218 Class 4 Impact Resistance requirements. CertainTeed's Commercial Roofing Technical Department is available to help your roofing contractor select the system that is best for you. They may be reached at 800-396-8134.



## Enjoy the extra confidence of SureStart™ protection



Your warranty is strong on its own. But you also get the added confidence of SureStart protection. That simply means if any problem due to a manufacturing defect occurs during the SureStart period, call us. Upon inspection, we'll cover labor and material replacement costs at 100%.

*Lifetime and 30-year limited transferable warranties, including 10- and 5-year SureStart™ protection, are applicable only in the United States, its territories and Canada; for products sold outside these areas, please refer to the International Warranty for specific details and limitations.*

*Some insurance companies offer premium discounts for the use of UL 2218 Class 4 products; check with your agent to see if you are entitled to a discount.*

*NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.*



# Integrity Roof System™

A COMPLETE APPROACH TO LONG LASTING BEAUTY AND PERFORMANCE



With as much care as you take in selecting the right contractor, choosing the right roof system is equally as important. A CertainTeed Integrity Roof System combines key elements that help ensure you have a well-built roof for long-lasting performance.

It all starts with CertainTeed's broad line of shingles, featuring brilliant color blends, dramatic styles and shadow lines, and the strongest warranties in the industry. The right shingle can mean the difference between an average, everyday look or a beautiful roof that's the talk of the neighborhood.

Shingles are just the beginning - to keep your new roof performing and looking great for years to come it takes a complete CertainTeed Integrity Roof System approach.

## 1. Waterproofing Underlayment

The first step in your defense against the elements. Self-adhering underlayment is installed at vulnerable areas of your roof to help prevent leaks from wind-driven rain and ice dams.

## 2. Water-Resistant Underlayment

Provides a protective layer over the roof deck and acts as a secondary barrier against leaks.

## 3. Starter Shingles

Starter Shingles are the first course of shingles that are installed and designed to work in tandem with the roof shingles above for optimal shingle sealing and performance.

## 4. Shingles

Choose from a variety of Good-Better-Best styles to complement any roof design and fit your budget.

## 5. Hip & Ridge Caps

Available in numerous profiles, these accessories are used on the roof's hip and ridge lines for a distinctive finishing touch to your new roof.

## 6. Ventilation

A roof that breathes is shown to perform better and last longer. Ridge Vents, in combination with Intake Vents, allow air to flow on the underside of your roof deck, keeping the attic cooler in the summer and drier in the winter.

learn more at: [certainteed.com/roofing](https://certainteed.com/roofing)



### CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 [certainteed.com](https://certainteed.com)