


LOMANCO® Lo-OmniRidge® VENTS

for FLAT CONCRETE TILE

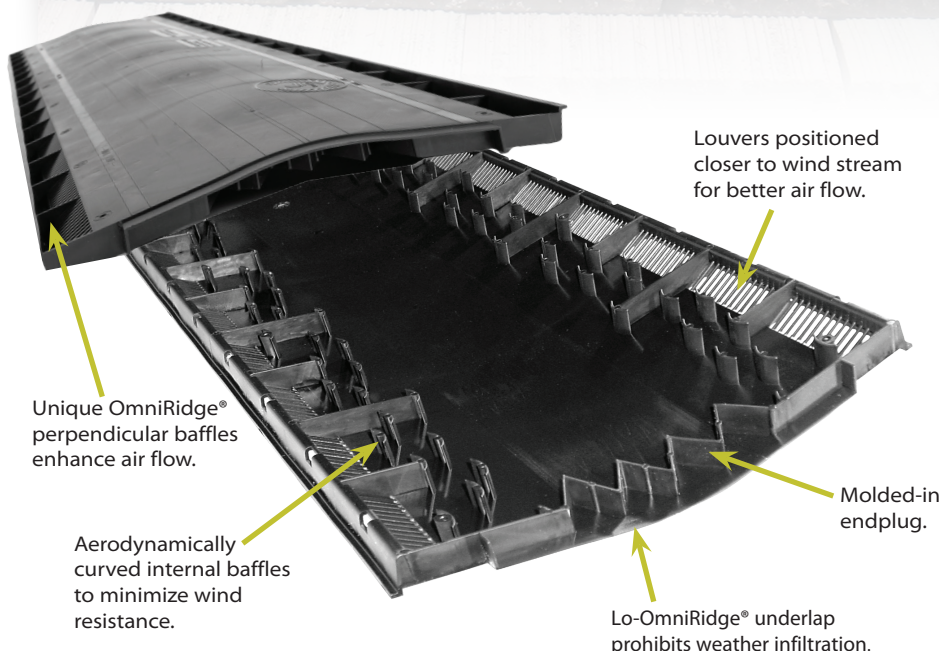

LOR9-4 FEATURES:

- ▶ Internal aerodynamic curved baffles.
- ▶ External perpendicular omni baffles.
- ▶ Weatherproof underlapping joint.
- ▶ Four drain holes per foot per side.
- ▶ 11 square inches of net free area per linear foot.
- ▶ External venturi baffle.
- ▶ Pre-formed to 3/12 pitch.
- ▶ Molded nail lines.
- ▶ Molded centerline for fast and easy alignment.
- ▶ Alignment tabs.
- ▶ External water shield.
- ▶ Slot width guide lines.
- ▶ Patented molded-in fanfolded endplug fits all roof pitches.
- ▶ Also available in **Class A Fire Rating**.
- ▶ **Lifetime Limited Warranty.**



Want more info?
Scan this QR
code with your
smartphone.

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Per Box
LOR9-4	4'	44	2/12 to 16/12	10

LOR9-4 Ventilation Guide

Attic floor space in square feet

Area Ventilated	1000	1500	2000	2500	3000	3500
LOR9-4 Required	22'	33'	44'	55'	66'	77'
Intake Required(in. ²)	242	363	484	605	726	847

MADE IN USA

LO445_0617

Lomanco, Inc. • lomanco.com • 1.800.643.5596



lomanco



lomancovents