

**|| Polaris 9200 Series**  
**Prestigious Natural Look, Handcrafted Quality**



## POLARIS COLLECTION

Natural beauty of real wood without compromising quality






## PRESTIGIOUS BEAUTY - PRISTINE -




\*Ask your dealer for details

Hörmann Polaris Collection series doors are constructed from a fine selection of real wood handcrafted with careful attention to detail to provide a durable, prestigious and long lasting quality door. Natural wood offers a distinctive and unique grain texture that will give your home a special appeal. Choose from a wide selection of standard designs or create your own look from a simple yet elegant E-Series or the more sophisticated C-series.


### E-Series

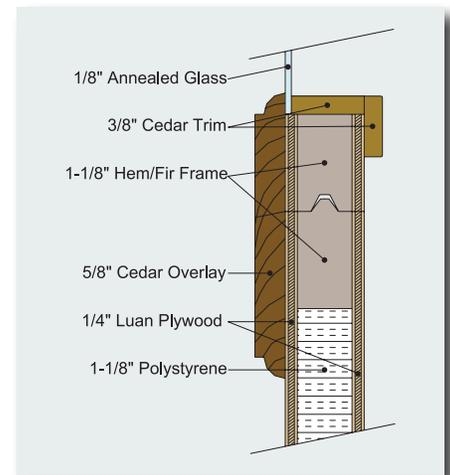


- 1  $\frac{5}{8}$ " Clear Western Red Cedar Overlay with  $\frac{7}{16}$ " profile bead where edges are exposed
- 2  $\frac{1}{4}$ " Luan Plywood Face (E-Series)
- 3 1X4 or 1X6 Tongue & Groove Clear Western Red Cedar Face applied over the exterior layer of Luan Plywood (C-Series)
- 4 Frame: Nominal  $\frac{1}{8}$ " Finger-Joint Kiln dried HEM/FIR, Double End Stiles (standard on all doors)
- 5 Windows: True divided, stopped and sealed position  $\frac{1}{8}$ " clear annealed glass (standard on all doors)

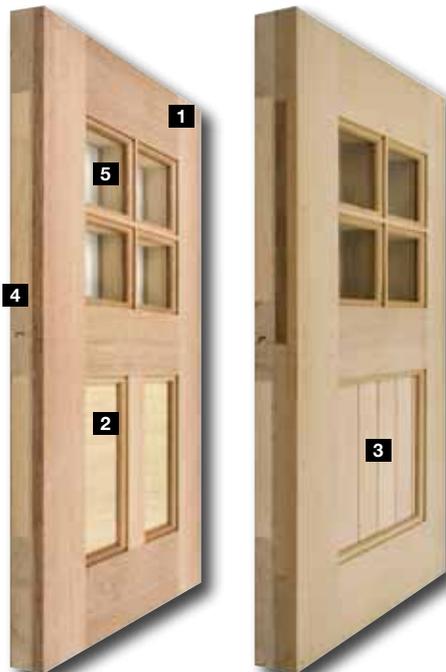


### C-Series

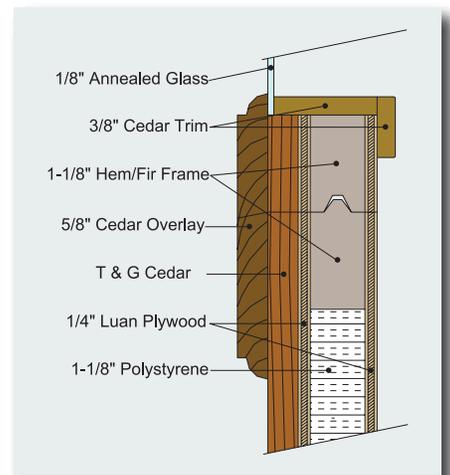

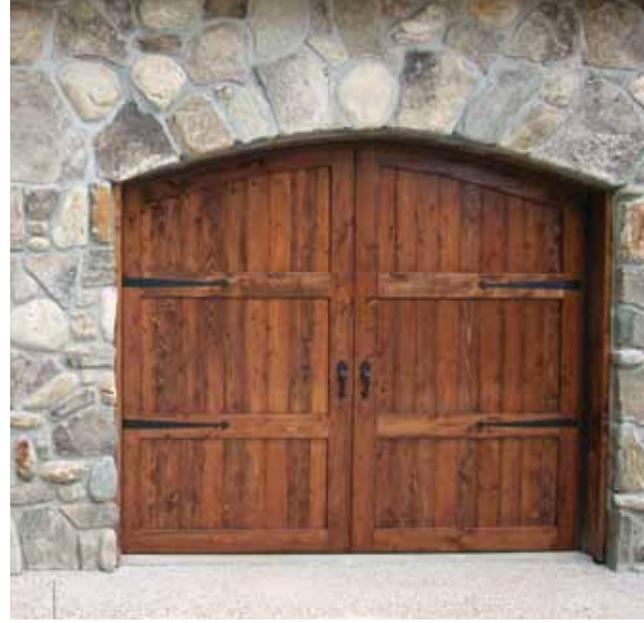


# DESIGN OPTIONS


## Fairmont




000S




001S



002S



003S



004S




006S



008S




009S




000A




001A



002A



003A



004A



006A




008A


## Richfield




100S



101S



102S



103S



104S



106S



108S



109S



100A



101A



102A



103A



104A



106A




108A


## Worthington



200S




201S



202S



203S




204S



206S



208S




209S



200A



201A



202A



203A



204A



206A



208A

## Baxter




300S



301S



302S



303S



304S



306S



308S



309S



300A



301A



302A



303A



304A




306A




308A

# DESIGN OPTIONS


## Rochester




A00S




A01S



A02S



A03S



A04S




A06S




A08S



A09S



A00A




A01A




A02A



A03A



A04A



A06A



A08A

## Woodbury




V00S




V01S



V02S



V03S



V04S



V06S



V08S



V09S



V00A



V01A



V02A



V03A



V04A



V06A



V08A

## Hastings



X00S



X01S



X02S



X03S



X04S



X06S



X08S



X09S



X00A



X01A



X02A



X03A



X04A



X06A



X08A

## Marshall




Z00S



Z01S



Z02S



Z03S



Z04S



Z06S



Z08S



Z09S



Z00A



Z01A



Z02A



Z03A



Z04A




Z06A




Z08A

# OPENING OPTIONS




**Sectional** (Standard)

Sectional overhead doors are supplied with standard lift, low head room, high lift or vertical lift door hardware.



**Bi Parting** (Custom)

Often referred to as Swing-Type or Bat-Wing doors and can use one half or both halves. These types of opening can also be used as sliders. Operational hardware is NOT included.




**One Piece** (Custom)


Typically used as sliders but may be used as one piece overhead (jamb-type) or with vertical lift / commercial hardware. Vertical lift sectional door hardware available.

# CUSTOM ARCH TEMPLATE INSTRUCTION

- 1 Position a piece of heavy-duty paper on the **inside** of the arched garage opening against the door jamb. The template must be level, wide enough to extend the full width of the door opening and tall enough to cover the arch plus approximately 6" of door jamb.
- 2 With a black or dark Magic Marker or crayon, trace the arch and the door jamb. Mark the requested dimensions and information as shown on the template below.
- 3 Roll up the template, label the roll with your name and quote number.
- 4 Mail the completed template to your Hörmann customer service representative.

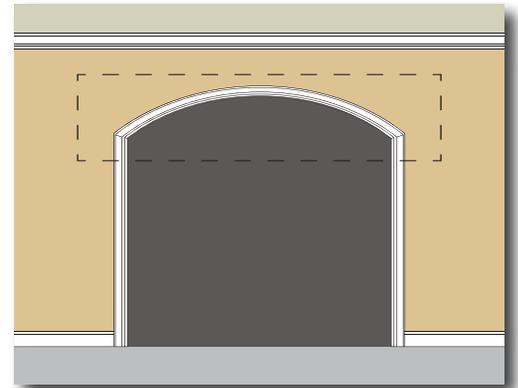

Please write information indicated on your template

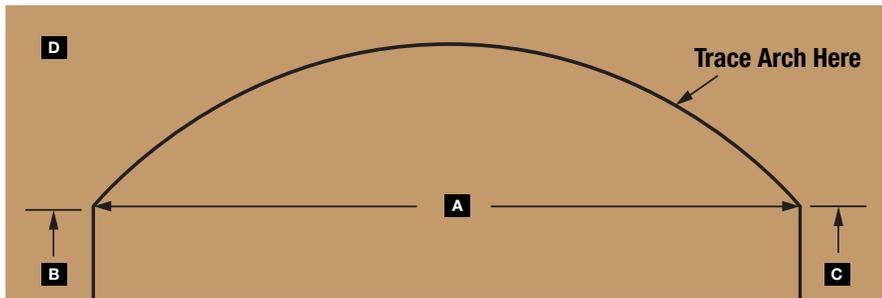

- A** Width of door opening (nearest 1/8")
- B** Distance to the floor on left hand side of the template from where the arch meets vertical portion of jamb
- C** Distance to the floor on right hand side of the template from where the arch meets vertical portion of jamb
- D** Company name, order number and date template was created

# POWDER COATED HARDWARE

To further enhance the beauty of your door's interior, we offer optional color powder coated track and operational hardware in four solid colors: Black, Grey, White and Brown.



## GLAZING OPTIONS

The Polaris 9200 series standard glass is 1/8 inch clear annealed. We offer a wide selection of optional glass types such as insulated, tempered, obscure and tinted. Custom glass is available up to 9/16 inch thick to meet your specific requirements. Please contact Hörmann Customer Service for more information and availability.



Clear



Smoked




Brown Tinted



Frosted



Feather Etched

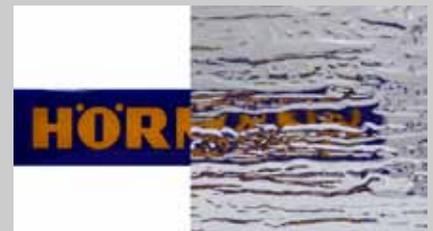

Tundra

## DECORATIVE HARDWARE OPTIONS

Enhance the look of your garage door with our attractive powder coated decorative hardware kits.



Malleable Iron



Stamped Steel / Crinkle Textured

## HARDWARE SPECIFICATIONS

<b>Track</b>	2" Industrial Grade, angle mounted vertical track and full length angle on horizontal track. 15" radius standard lift or 6" low clearance track is standard, 3" Industrial Grade track supplied when required by weight. 3" track, high lift, vertical lift and follow roof line pitch track are available options.
<b>Hinges</b>	14 gauge Industrial Grade galvanized center and double end hinges and 14 gauge narrow profile center intermediate hinges. (distance between hinges not to exceed 27" center to center)
<b>Rollers</b>	2" Industrial Grade, long stem steel, 11-ball bearing type with Nylon outer races.
<b>Struts</b>	All doors to 15'0" wide, one 2 1/4" galvanized horizontal strut per section minimum, doors exceeding 15'0" in width, one 3" galvanized strut per section minimum.
<b>Counter Balance</b>	High cycle torsion springs, galvanized aircraft cable, cast aluminum cable drums and 1" diameter tube/shaft. Extended life high cycle torsion springs are an available option.
<b>Fasteners</b>	The center hinges and outermost row of end hinges are attached to the door with hex head bolts and concealed high strength fasteners that are embedded in the door frame. Zinc plated fasteners, bolt and nuts are standard for all fastening applications.
<b>Operation</b>	Manual push up is standard, lock assembly not supplied. <i>Electric operation recommended for best possible operation.</i>

**Note:** Wood garage doors must be finished prior to installation and protected from moisture at all times until the finish as been applied to the door. Seal and protect all sides, edges and surfaces.

Everything you've always wanted in a garage door, and more.

**HÖRMANN**

**Our promise to you.**

As one of the world's leading manufacturers of doors, we're committed to providing the best quality, value, and selection. Whether residential or commercial, whether steel, aluminum, wood, or high density polyethylene,

whether traditional or contemporary, we have the door you're looking for. Each Hörmann door gives you the perfect array of benefits and options, with the drive to match.



Hörmann Orion TimberLast™ Collection



Hörmann Phoenix Collection



Hörmann Aries Collection

*SilentDrive*®

The advanced technology in SilentDrive® garage door openers provide:

- Ultra quiet performance
- Unique safety features
- Maximum convenience



**AVAILABLE FROM:**



*Environmental commitment has been part of our corporate culture for decades, from our manufacturing processes to the products we make.*

*In everything we do, we strive to minimize energy and resource use, through efficient processes long-lasting quality and innovative engineering.*

**Call us ► 1 877 OK HORMANN (1-877-654-6762)**

Hörmann LLC, 5050 Baseline Road, Montgomery, Illinois 60538  
Phone: 630-859-3000 Fax: 630-859-8122  
Email: info@hormann.us www.hormann.us

