


TAMKO® NON-FIBERED ALUMINUM ROOF COATING

PRODUCT DATA

An excellent protective material formulated for the professional roofing contractor. Combining high quality asphalts and petroleum solvents with aluminum pigments, to form a bright, highly reflective surface upon application.

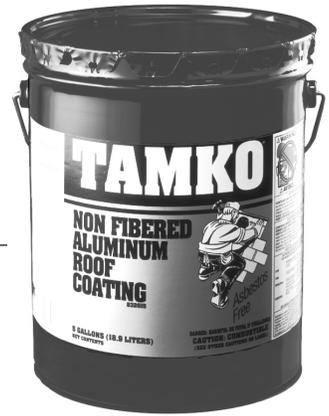

PRODUCT NUMBER
30002031 - 5 GAL - Green Cove Springs FL
30001298 - 5 GAL - Columbus KS

USES

100% ASBESTOS FREE - GUARANTEED!

This thin highly reflective coating is ideal for coating prepared roofing, metal buildings, tanks, bins, grain elevators, exterior masonry and mobile home roofs. It reduces inside summer temperature by up to 15°F by reflecting the sun's harmful rays and provides an attractive surface that protects and prolongs the surface life.

APPLICATION

Apply with a roofers brush, paint roller or spray equipment. Outside temperature must be 50°F and rising before applying. Prime all metal, concrete, and masonry surfaces with a Quick Dry Primer to coating. Application rates include:

Composition Roofing	1 gallon per 150 sq. ft.
Metal Surfaces	1 gallon per 200 sq. ft.
Concrete/Masonry	1 gallon per 150 sq. ft.

Stir thoroughly before and during use to obtain uniform distribution of the aluminum pigments

Dries to touch in 2 to 4 hours depending on weather conditions.

PRODUCT DATA*

TYPICAL PHYSICAL PROPERTIES*

	<u>MIN</u>	<u>MAX</u>
Total solids (non-volatiles), %	40	--
Volatiles, %	--	50
Flash point, °F	100	--
Asphalt, %	25	--
VOC, grams/litre	--	500
Viscosity, Stormer/100 rev. @77°F, seconds	20	30
Reflectance, %	50	--
Metalic Aluminum, %	11	--

*All values stated as nominal

Visit our Web Site at tamko.com

For Technical Services call 1-800-641-4691

CAUTION: The National Institute for Occupational Safety and Health has concluded that the fumes of heated roofing asphalt are a potential occupational carcinogen. The physical nature of this product may help limit any inhalation hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. This product should not be heated or burned using a direct flame device. Take precautions to prevent breathing and contact with skin.



TAMKO
BUILDING PRODUCTS

TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

Central District	220 West 4th St.	Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr.	Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St.	Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp.	Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave.	Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.