



**BUILDING PRODUCTS**

**WATERPROOFING**

TAMKOWATERPROOFING.COM

**DIVISION 7**



# POWERFUL WATER CONTROL

Using the same SBS-modified technology we pioneered in the 1970s, TAMKO continues to raise the standard in waterproofing to help you succeed. TAMKO offers powerful water control backed by over 70 years of building product experience.




## SINGLE FAMILY CONSTRUCTION

TAMKO offers waterproofing solutions for applications ranging from foundations, windows and doors to specialty roofing. Our residential products are designed for ease of application and with the product performance you expect.

## MULTIFAMILY CONSTRUCTION

TAMKO® waterproofing covers the various areas multifamily projects might have, including challenging balcony and breezeway applications. Below-grade and above-grade options help meet your multifamily needs.



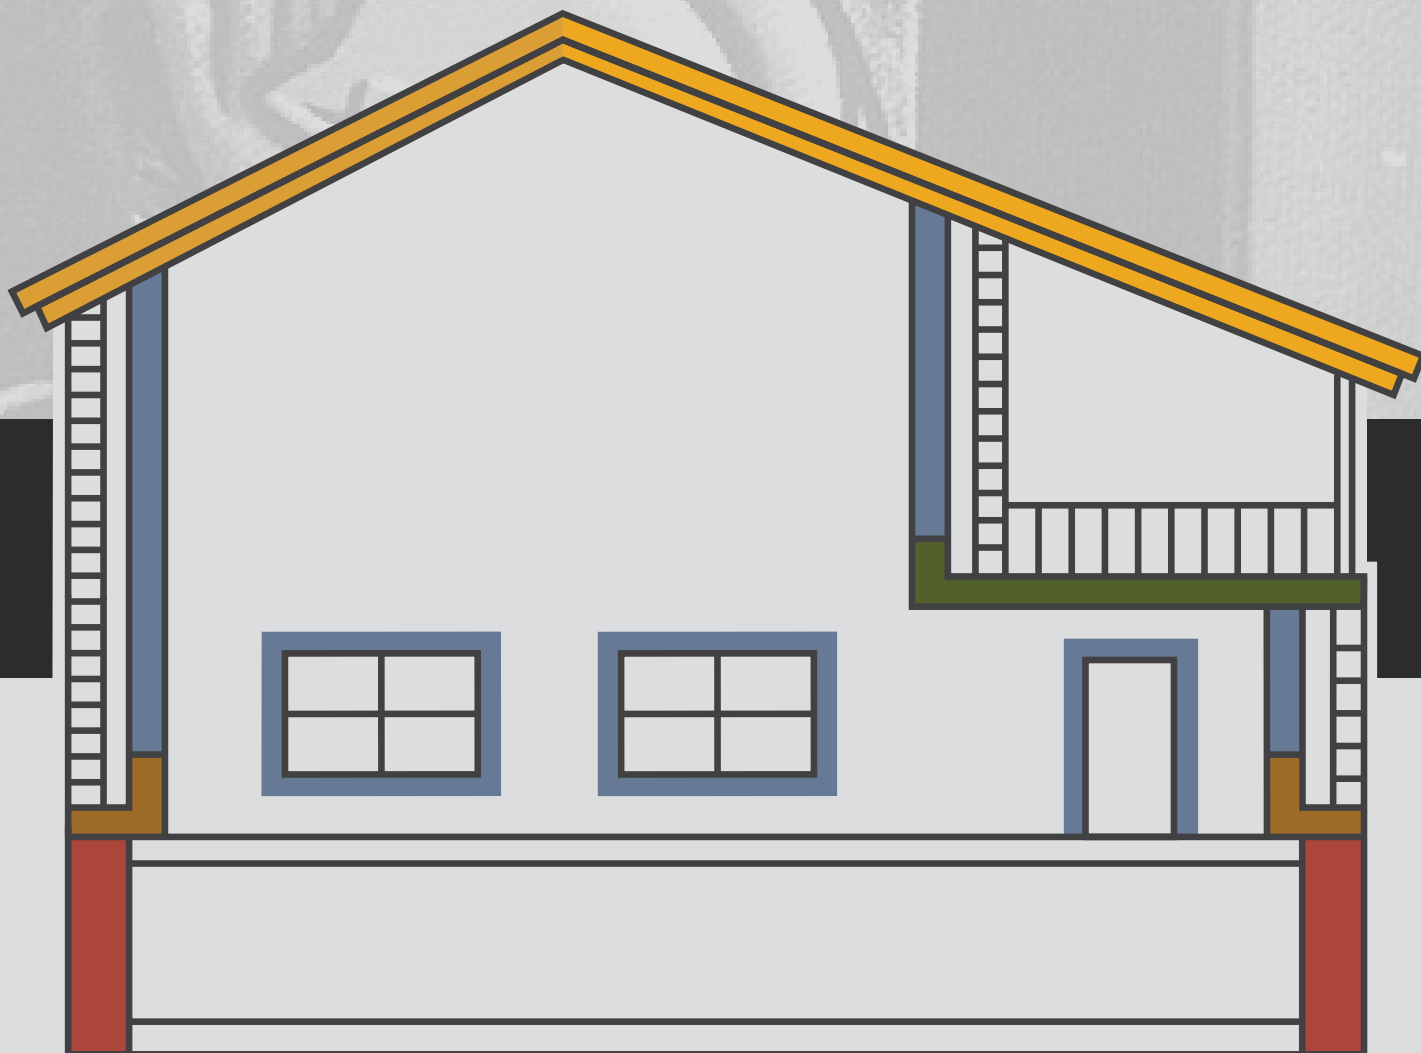

## TAMKO® WATERPROOFING PRODUCTS



Balcony / Breezeway




Specialty Underlayments



Below-Grade



Window, Door & Cavity



Thru-Wall

### **WATERPROOFING PRODUCTS BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE.**

BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG WATERPROOFING PRODUCTS WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY FOR MANY PRODUCTS, THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT [TAMKO.COM](http://TAMKO.COM) OR BY CALLING 1-800-641-4691.



## BALCONY/BREEZEWAY

TAMKO® balcony/breezeway products can be combined with other products to help prevent water intrusion in elevated areas.


### THE CONVENIENCE OF **KICK AND ROLL**

Contractors appreciate TW-60's treated release film as opposed to paper, which can stick or tear. The simple application allows the contractor to get the job done faster. Simply **kick and roll!**

### **TW-60 SHEET WATERPROOFING MEMBRANE†**

TW-60 is a self-adhering rubberized asphalt sheet membrane with a polymer film on the surface. Features a removable treated release film on the adhesive side. TW-60 can be used for above-grade areas on balcony/breezeways, terraces, plaza decks and parking decks and is used in conjunction with TAMKO's TW-105 Flashing, TWM-1 Mastic, TWP-1 Quick Dry Primer or TWP-2 Water-Based Primer.


- 60-mil thickness\*
- Available in factory precut widths of 6", 9", 12", 18" and full 39 3/8" rolls\*
- Available in Summer and Winter Grade formulas
- 5-year Limited Warranty & Arbitration Agreement

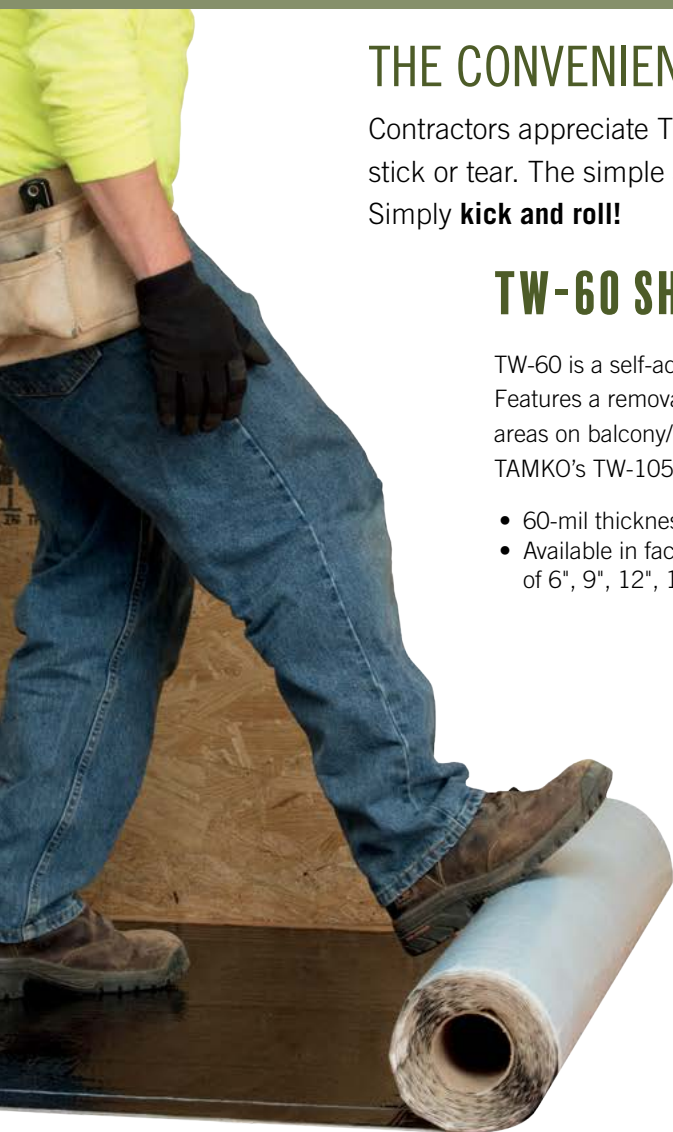

† Not intended for use on roofs or prolonged exposure to temperatures above 200°F.

\*Subject to manufacturing variation



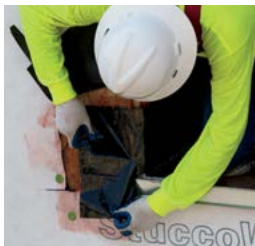

## TW-105 FLASHING<sup>†</sup>

TW-105 Flashing is a self-adhering rubberized asphalt sheet membrane with a polymer film on the surface and removable split release film on the adhesive side.

TW-105 Flashing is used for balcony and breezeway detail in conjunction with TAMKO® TW-60 self-adhering waterproofing membrane, TWM-1 Mastic, TWP-1 Quick Dry Primer or TWP-2 Water-Based Primer. TW-105 Flashing can be installed at wall/floor intersections and other transition locations.

- Available in Summer and Winter Grade formulas
- 105-mil thickness\*
- 5-year Limited Warranty & Arbitration Agreement
- Split release film



## ADHESIVE PRIMERS

- TWP-1 Adhesive Primer is a high-quality rubberized primer
- TWP-2 Water-Based Adhesive Primer is a rubberized water-based primer
- TWP-LV1 Adhesive Primer is a solvent-based low VOC primer
- TWP-1 Adhesive Primer and TWP-LV1 Adhesive Primer feature a red tint
- Available in 5 gallon pails
- 5-year Limited Warranty & Arbitration Agreement

## TWM-1 MASTIC

Designed for multiple uses, including finishing the edge of seams, overlaps, patches and terminations of properly sealed TAMKO® waterproofing membranes. TWM-1 Mastic is a high-quality trowel-grade rubberized bitumen mastic that dries to a strong but pliable seal, allowing for minor expansion and contraction.

Applied with a trowel or caulking gun.

- Available in 10.5 oz. tubes, quart tubes, 3 gallon pails
- 5-year Limited Warranty & Arbitration Agreement



## TW-DRAIN 220

TW-DRAIN 220 is a prefabricated drainage composite consisting of a light duty impermeable polymeric sheet bonded to a layer of non-woven fabric. TW-Drain 220 also contains an additional protection sheet bonded to the back side of the cusped core providing protection for soft membrane waterproofing systems.

- Compatible with waterproofing systems without the use of a protection board
- Available in 4' x 50' rolls
- 5-year Limited Warranty and Arbitration Agreement



# SPECIALTY UNDERLAYMENTS

When standard underlayments don't meet your needs, look to TAMKO's specialty roof underlayments.



## TW UNDERLAYMENT

A self-adhering rubberized asphalt sheet membrane with a polymer film on the surface and a removable treated release film on the adhesive side. Surface is textured for skid resistance and can be left exposed for up to 120 days. TW Underlayment is used for metal roofs, mechanically fastened tile, slate, wood shakes, asphalt and composite shingles.

- 40-mil thickness\*
- UL Classified as a Prepared Roofing Accessory
- ICC-ES ESR-1252
- Tested for High Temperature Resistance up to 240°F\*\*
- Miami-Dade County Approved
- Florida Building Code Approved: FL 12328
- 5-year Limited Warranty & Arbitration Agreement



## TW METAL & TILE UNDERLAYMENT

A fiberglass-reinforced self-adhering rubberized asphalt sheet membrane with a polymer film on the surface. Features a removable treated release film on the adhesive side for convenient installation and handling. TW Metal & Tile Underlayment can be left exposed for up to 120 days and is used under metal roofs, mechanically fastened tile, slate, wood shakes, asphalt and composite shingles.

- Fiberglass reinforced
- Split treated release film
- UL Classified as a Prepared Roofing Accessory
- ICC-ES ESR-1252
- Tested for High Temperature Resistance up to 240°F\*\*
- Miami-Dade County Approved
- Florida Building Code Approved: FL 12328
- 5-year Limited Warranty & Arbitration Agreement



\*\* See TAMKO Technical Notice dated May 4, 2018 for testing information. Available at [www.tamko.com](http://www.tamko.com)





## BELOW-GRADE

Waterproof and protect foundational areas with TAMKO's below-grade waterproofing products. These products can be used together to help with waterproofing.



### TW-60 SHEET WATERPROOFING MEMBRANE<sup>†</sup>

A self-adhering rubberized asphalt sheet membrane with a polymer film on the surface and a removable treated release film on the adhesive side. TW-60 can be used for below-grade waterproofing applications such as foundation walls, tunnels and earth shelters, ICFs and similar structures.


- 60-mil thickness\*
- Available in factory precut widths of 6", 9", 12", 18" and full 39-3/8" rolls\*
- Available in Summer and Winter Grade formulas
- 5-year Limited Warranty & Arbitration Agreement



### TWM-1 MASTIC

Designed for multiple uses, including finishing the edge of seams, overlaps, patches and terminations of properly sealed TAMKO® waterproofing membranes. TWM-1 Mastic is a high-quality trowel-grade rubberized bitumen mastic that dries to a strong but pliable seal, allowing for minor expansion and contraction. Applied with a trowel or caulking gun.

- Available in 10.5 oz. tubes, quart tubes, 3 gallon bucket
- 5-year Limited Warranty & Arbitration Agreement

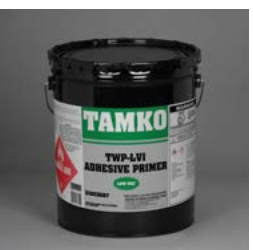

### ADHESIVE PRIMERS

- TWP-1 Adhesive Primer is a high-quality rubberized primer
- TWP-2 Water-Based Adhesive Primer is a rubberized water-based primer
- TWP-LV1 Adhesive Primer is a solvent-based low VOC primer
- TWP-1 Adhesive Primer and TWP-LV1 Adhesive Primer feature a red tint
- Available in 5 gallon pails
- 5-year Limited Warranty & Arbitration Agreement

<sup>†</sup> Not intended for use on roofs or prolonged exposure to temperatures above 200°F.

\*Subject to manufacturing variation



# WINDOW, DOOR & CAVITY FLASHING

Help reduce callbacks and get the job done right the first time with TAMKO's window and door flashing products.



## TW WINDOW & DOOR FLASH<sup>†</sup>

A self-adhering rubberized asphalt flashing membrane with a white polymer surface film and a removable treated release film on the adhesive side. White polymer film surface can be left exposed up to 180 days. TW Window & Door Flash is used for sealing window and door perimeters.

- 25-mil thickness\*
- Available in factory precut widths of 4", 6", 9", 12" and 18" rolls\*
- Adheres to cast-in-place concrete, precast concrete, concrete masonry block, exterior gypsum sheathing, plywood, OSB, DensGlass®, EPS insulation, wood, vinyl or metal surfaces
- 5-year Limited Warranty & Arbitration Agreement



## TW FLASH-N-WRAP® 25 REFLECTIVE SHEET MEMBRANE<sup>†</sup>

A self-adhering rubberized asphalt sheet membrane with a reflective aluminum surface film. Features a removable treated release film on the adhesive side for installation and handling. TW Flash-N-Wrap® 25 can be left exposed up to 180 days and is used for sealing window and door perimeters.

- 25-mil thickness\*
- Available in factory precut widths of 4", 6", 9", 12" and 18" rolls\*
- Adheres to cast-in-place concrete, precast concrete, concrete masonry block, exterior gypsum sheathing, plywood, OSB, DensGlass®, EPS insulation, felt and foil-faced polyisocyanurate foam insulation, wood, vinyl or metal surfaces
- 5-year Limited Warranty & Arbitration Agreement

<sup>†</sup>Not intended for use on roofs or prolonged exposure to temperatures above 200°F.

\*Subject to manufacturing variation





## TW FLASH-N-WRAP® 40 REFLECTIVE SHEET MEMBRANE†

A self-adhering rubberized asphalt sheet membrane with a reflective aluminum surface film. Features a removable treated release film on the adhesive side for installation and handling. TW Flash-N-Wrap® 40 can be left exposed up to 180 days and is used for sealing window and door perimeters.

- 40-mil thickness\*
- Available in factory precut widths of 9", 12" and 36" rolls\*
- Adheres to cast-in-place concrete, precast concrete, concrete masonry block, exterior gypsum sheathing, plywood, OSB, DensGlass®, EPS insulation, felt and foil-faced polyisocyanurate foam insulation, wood, vinyl or metal surfaces
- 5-year Limited Warranty & Arbitration Agreement



## TW MOISTURE WRAP MOISTURE/AIR BARRIER MEMBRANE†

A self-adhering rubberized asphalt sheet membrane with a clear polymer film on the surface. Features a removable treated release film on the adhesive side for installation and handling. TW Moisture Wrap can be used as an above-grade moisture/air barrier for application in cavity wall construction, the sealing of window and door perimeters and the sealing of wall joints, corners and other terminations.

- 40-mil thickness\*
- Available in factory precut widths of 4", 6", 9", 12", 18", 24", 36" and 39 3/8" rolls\*
- Individually wrapped factory precut widths with point-of-purchase labels available in 4", 6" and 9" rolls\*
- Adheres to cast-in-place concrete, precast concrete, concrete masonry block, exterior gypsum sheathing, plywood, OSB, DensGlass®, EPS insulation, felt and foil-faced polyisocyanurate foam insulation, wood, vinyl or metal surfaces
- 5-year Limited Warranty & Arbitration Agreement





# THRU-WALL

Create a water barrier with TAMKO's thru-wall products.



## TW THRU-WALL FLASHING MEMBRANE†

TW Thru-Wall is a self-adhering sheet membrane consisting of a self-adhering rubberized asphalt and an 8-mil polymer film as the top surface. Features treated release film for installation and handling. TW Thru-Wall is used with concrete, masonry, gypsum, felt-faced and foil-faced polyisocyanurate foam insulation or wood wall construction.

- 40-mil thickness\*
- Available in factory pre-cut widths of 12", 18", 24" and 36" rolls\*
- 5-year Limited Warranty & Arbitration Agreement



## TWM-1 MASTIC

Designed for multiple uses, including finishing the edge of seams, overlaps, patches and terminations of properly sealed TAMKO® waterproofing membranes. TWM-1 Mastic is a high-quality trowel-grade rubberized bitumen mastic that dries to a strong but pliable seal, allowing for minor expansion and contraction. Applied with a trowel or caulking gun.

- Available in 10.5 oz. tubes, quart tubes, 3 gallon bucket
- 5-year Limited Warranty & Arbitration Agreement



## ADHESIVE PRIMERS

- TWP-1 Adhesive Primer is a high-quality rubberized primer
- TWP-2 Water-Based Adhesive Primer is a rubberized water-based primer
- TWP-LV1 Adhesive Primer is a solvent-based low VOC primer
- TWP-1 Adhesive Primer and TWP-LV1 Adhesive Primer feature a red tint
- Available in 5 gallon pails
- 5-year Limited Warranty & Arbitration Agreement

† Not intended for use on roofs or prolonged exposure to temperatures above 200°F.

\*Subject to manufacturing variation





# GET TOUGH ON WATER WITH TAMKO® WATERPROOFING.

TAMKO's waterproofing products offer multiple applications to help defend your single and multifamily projects from water damage, from the ground up.





## BUILDING PRODUCTS FOR THE PROFESSIONAL

Since 1944, building professionals and homeowners have looked to TAMKO® for building products. Today, we offer a wide range of building products, including Heritage® Laminated Asphalt Shingles, Elite Glass-Seal® 3-tab Shingles, MetalWorks® steel shingles, waterproofing materials, ventilation products, Envision® Composite Lumber, EverGrain® Composite Lumber, Marquee Railing® and Tam-Rail® Railing Systems.

### WATERPROOFING PRODUCTS BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE.

BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG WATERPROOFING PRODUCTS WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY FOR MANY PRODUCTS, THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT TAMKO.COM OR BY CALLING 1-800-641-4691.



P.O. Box 1404  
Joplin, MO 64802-1404  
1-800-641-4691  
tamkowaterproofing.com

**IMPORTANT SAFETY INFORMATION:** Use personal fall protection devices when working with these products. Personal fall protection devices, safety glasses and hearing protection must always be used when applying these products. Moisture, frost or debris will decrease the traction when walking on these products. Applicator safety is of utmost importance.

©2018 TAMKO Building Products, Inc.

TAMKO, MetalWorks, Heritage, TW Flash-N-Wrap, EverGrain, Envision, Marquee Railing and Tam-Rail are registered trademarks of TAMKO Building Products, Inc.

DensGlass is a registered trademark of Georgia-Pacific Corporation.

Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at tamko.com or call us at 1-800-641-4691.